


Shoulder Bushings - Hardened & Precision Ground

- Bushings are stocked to dimensions & tolerances shown
- Eliminates galling to leader pins
- Case-Hardened



PCS Shoulder Bushings are hardened and precision ground. Nominal diameters ranging from 3/4" to 3" are available. PCS Shoulder Bushings reduce friction on leader pins and are press-fit into place.

SPECIFICATIONS				
NOMINAL I.D.	I.D. +.0005 / - .0000	O.D. +.0005 / - .0000	H MAX	T +.000 / - .005
3/4	0.7505	1.1255	1.250	0.187
7/8	0.8755	1.2505	1.375	0.187
1	1.0005	1.3755	1.500	0.187
1-1/4	1.2505	1.6255	1.750	0.187
1-1/2	1.5005	2.0005	2.125	0.187
2	2.0005	2.5005	2.625	0.187
2-1/2	2.5005	3.2505	3.375	0.187
3	3.0005	3.7505	3.937	0.500

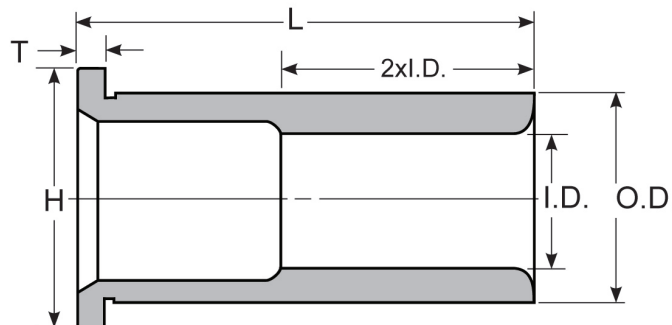

Standard: Inch
Material: 4130
Hardness: 58 - 62 Rc

L LENGTH -.030 / - .060	CATALOG NO.							
	I.D. = 3/4"	I.D. = 7/8"	I.D. = 1"	I.D. = 1-1/4"	I.D. = 1-1/2"	I.D. = 2"	I.D. = 2-1/2"	I.D. = 3"
7/8	BU-100	BU-200	BU-300	BU-400	BU-500			
1-3/8	BU-101	BU-201	BU-301	BU-401	BU-501	BU-601	BU-701	
1-7/8	BU-102	BU-202	BU-302	BU-402	BU-502	BU-602	BU-702	
2-3/8	BU-103	BU-203	BU-303	BU-403	BU-503	BU-603	BU-703	
2-7/8	BU-104	BU-204	BU-304	BU-404	BU-504	BU-604	BU-704	
3-3/8	BU-105	BU-205	BU-305	BU-405	BU-505	BU-605	BU-705	
3-7/8	BU-106	BU-206	BU-306	BU-406	BU-506	BU-606	BU-706	BU-806
4-3/8			BU-307	BU-407	BU-507	BU-607	BU-707	
4-7/8		BU-208	BU-308	BU-408	BU-508	BU-608	BU-708	BU-808
5-7/8		BU-209	BU-309	BU-409	BU-509	BU-609	BU-709	BU-809
7-7/8								BU-811